


OC

Standard E18 Style Outlet Caps




AAR Approval Number: **Not Applicable**

Size: for use with 4" Valve
 Maximum Pressure: 500 psi
 Maximum Temperature: Based on Gasket
 Tank Mounting: 5-1/4 Thread
 Customer Connection: Female NPT
 Body: Stainless, Carbon Steel, or Aluminum
 Hardware: Stainless or Carbon Steel Chain

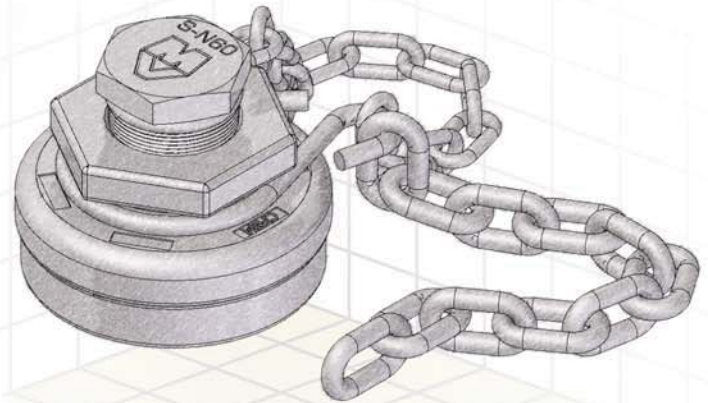

OPTIONAL CHAIN LENGTHS AVAILABLE

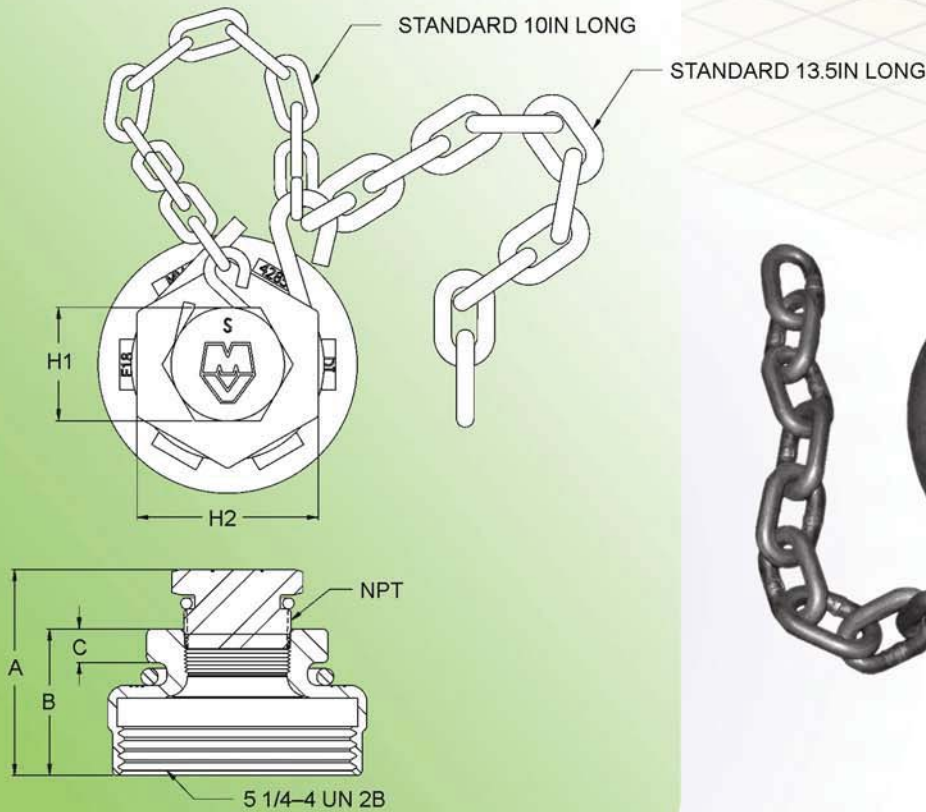

	A	B	C	H1	H2	NPT
OC	4.56	3.25	0.75	2.5	4.0	2IN
OCH	5.30	4.12	1.00	2.5	4.0	2IN
OC3	4.50	3.25	0.75	3.5	5.0	3IN



Standard E18 Style Outlet Caps



AAR Approval Number: **Not Applicable**

MODEL	OPTIONS	CAP MATERIAL	PLUG MATERIAL	CHAIN MATERIAL	CHAIN CONNECTIONS	MARKING	CHAIN TO CAR LEN	CHAIN TO PLUG LEN
OC	H - HEAVY HEX	S6 - 316 SS	S6 - 316 SS	SS - STAINLESS	B - RING AND BOLT	M - MV LOGO	example	example
	3 - 3IN PLUG	CD - CD4MCu STAINLESS	S4 - 416 SS	CS - CARBON STEEL	H - S-HOOK	U - U LOGO	100 - 1"	100 - 1"
		DI - DUCTILE IRON	CS - CARBON STEEL		D - DOUBLE CHAIN	B - BLANK	1762 - 17-5/8"	1762 - 17-5/8"
	OMIT FOR STANDARD	N6 - NITRONIC 60	N6 - NITRONIC 60				OMIT FOR STANDARD	OMIT FOR STANDARD
		AL - ALUMINUM	AL - ALUMINUM					

Common Variation Model Numbers	McKenzie Part Number
OC-ALS6-CS-HM	510276-01
OC-DICS-CS-HM	510173-01
OC-S6N6-SS-HM	510174-03
OC-S6S4-CS-HM	510174-02
OC-S6S4-SS-HM	510174-01
OC-S6S6-CS-HU	510381-02
OC-S6S6-SS-HU	510381-01
OCH-CDS4-SS-BM	504033-02
OCH-CDS6-SS-BU	504033-01
OCH-DICS-CS-HM	MV10009-01
OCH-DICS-CS-HM-1600	MV10036-01
OCH-DICS-CS-HM-2000	MV10039-01
OCH-DICS-SS-BU	504034-01
OCH-CD-D	098782-01
OCH-DI-D	096835-01
OCH-DICS-CS-DU	507448-01
OC3-DICS-CS-HM	510175-01
OC3-S6N6-SS-HM	510176-03
OC3-S6S4-CS-HM	510176-02
OC3-S6S4-SS-HM	510176-01